

Telescopic Roller Conveyor

- The Telescopic Roller Conveyors are extendable conveyors used for the loading and unloading of trucks, containers, and the like.
- The conveyor supports are fitted with casters to facilitate conveyor movement and stowing when not in use.
- These conveyors do not need any power, and could be extended using one operator.

سيور رولات تلسكوبية

- هذه السيور تخدم متطلبات شحن وتفريغ السيارات والحاويات وكذلك التداول داخل المصانع والمخازن حيث تتميز بإمكانية تغيير أطوالها حسب الحاجة , كما يمكن ضمها الى اصغر طول لها, وذلك لتخزينها.
- السيور مزودة بأرجل ذات عجل حر بغرامل لتسهيل نقلها في كافة ارجاء الموقع كما يمكن فردها وإغلاقها بسهولة ويسر بواسطة فرد واحد فقط.

Factory :New Borg El Arab 2nd Zone
entrance 2c street 3 - entrance 2c street 5
Tel:+20-(03)-4624127 - 4624126 - 4624025
fax : (03) 4624291

Info@UnitelEgypt.com

Cairo Office : Corniche El Nile, Maadi, Cairo
Tel +20:(0)2-25266333
Fax +20:(0)2-25264888

Sales@UnitelEgypt.com



www.UnitelEgypt.com



/UnitelEgypt

TRC Telescopic Roller Conveyors

Features

These UNITEL Telescopic Roller Conveyors offer cost effective, safe and virtually maintenance-free handling of any goods with a suitable contact surface and feature galvanized rollers mounted on a precision made frame.

Rollers are set high for unobstructed transport of goods larger than the conveyor's nominal width.

The conveyor supports are fitted with casters to facilitate conveyor movement. The brakes on the casters add to the system's stability during use..

Characteristics

The TRC Telescopic Roller Conveyors are multi-section units with 2, 3 or 4 sections. The sections retract and expand manually to adjust conveyor length to the desired size.

The supports of the conveyor are fitted with casters with brakes for easy movement of the conveyor.


Applications

Transport of unit goods, such as cartons, crates, boxes, and virtually any goods with a suitable contact surface, where low cost is required, and manual or gravity operation is acceptable.

It is widely used in warehouses and factory floors and can easily be stored retracted to minimize space.

TRC Telescopic Roller Conveyors

Specifications

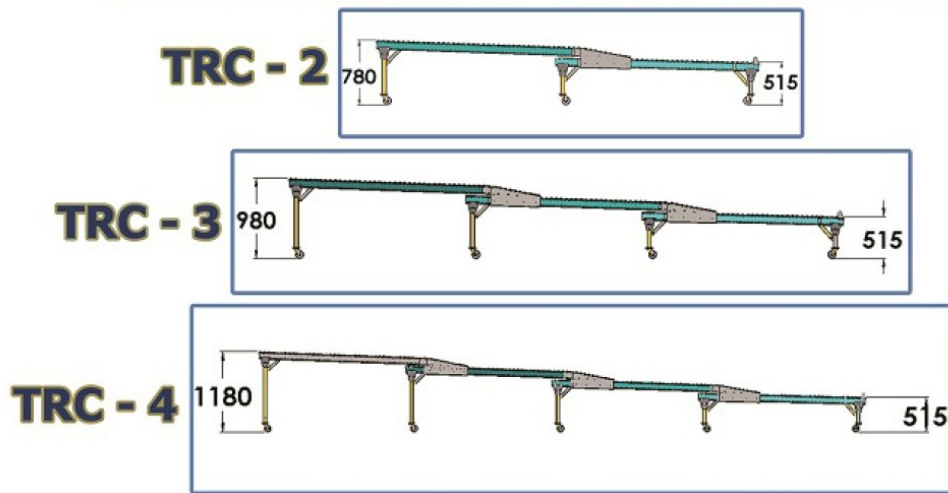

Dimensions

Standard Width (W) / preferred Values

Outer Distance (Wo)


w	400	500	650
---	-----	-----	-----

Model	Number of Sections عدد الوصلات	Retracted Length طول الوصلات مغلقة	Extended length طول الوصلات مفتوحة
TRC-2	2	3340 mm	4570 mm
TRC-3	3	4000 mm	6700 mm
TRC-4	4	4780 mm	8850 mm

Accessories

End Stops	Yes
Guard Rails	No

TRC Telescopic Roller Conveyors

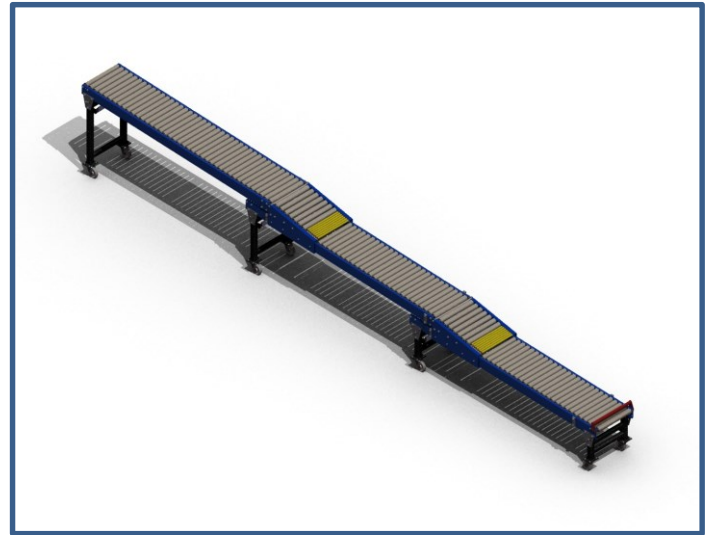

مكتب القاهرة : برج القانونيين كورنيش المعادى
تليفون : ٢/٢٥٢٦٦٣٣٣
فاكس : ٢/٢٥٢٦٤٨٨٨

مدينة برج العرب الجديدة - المنطقة الصناعية الثانية
يونيتل/ مدخل ٢ شارع ٣ - مدخل ٢ شارع ٥
تليفون : ٣/٤٦٢٤٤٢٤-٤٦٢٤٠٢٥-٤٦٢٤١٢٦-٤٦٢٤١٢٧
فاكس : ٣/٤٦٢٤٢٩١



www.UnitelEgypt.com

[f](https://www.facebook.com/UnitelEgypt) [You Tube](https://www.youtube.com/UnitelEgypt) [/UnitelEgypt](https://twitter.com/UnitelEgypt)

Sales@UnitelEgypt.com

Info@UnitelEgypt.com